



PARASOLS | *strongwind*

 **breezefree**

PARASOLS | *strongwind*

PARASOLS | *strongwind*

4	Introduction
6	Gallery
10	Safety
11	Strength
12	Sizes & Specifications
16	End-arm Heaters
17	Swift-Fold Heaters
18	Ground Sockets
19	Bases
20	Valances
21	Gutters
22	Branding
23	Lighting
24	Fabric Colours



PARASOLS | *strongwind*

Traditional, central-mast parasols have, for many years, been the most popular choice for outdoor shade and shelter. ***Strongwind*** parasols with their increased strength and durability, make them perfect for the commercial market.

The superior wind resistance of ***Strongwind*** parasols make them a perfect solution for exposed locations. Tested in Mercedes-Benz's wind tunnel, Strongwind Parasols have withstood winds of up to 60mph.

Strongwind parasols are telescopic and crank lever operated. Their strength comes from a significantly larger mast diameter and wall thickness, as well as wider parasol arms. ***Strongwind*** parasols are available with optional heaters, lights, side panels, gutters and branding



PARASOLS | Strongwind



PARASOLS | *Strongwind*



PARASOLS | Strongwind





PARASOLS | Strongwind

Strongwind parasols have passed extensive load and rigidity testing by TUS/SUD and we are proud to carry the “*Production Monitored - Safety Tested*” quality seal.




Strong and stable mast, its lower part reinforced with interior pipes.


The corner arms of square parasols are reinforced with galvanized steel tubes to provide additional strength.

The connecting joints between the parasol arms and supporting arms are made with U channels.





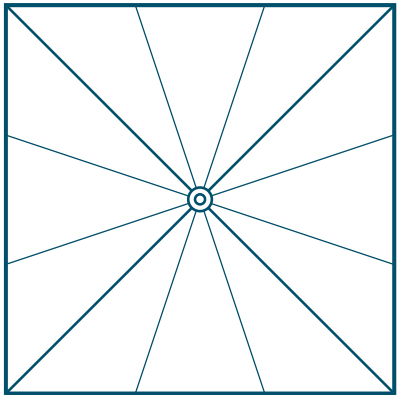


SIZE <i>m</i>	AREA <i>m</i> ²	CLOSED HEIGHT (A) <i>m</i>	OPEN HEIGHT (B) <i>m</i>	HEAD HEIGHT (C) <i>m</i>	CLEARANCE (D) <i>m</i>	WEIGHT <i>Kg</i>	MAX. WIND RESISTANCE <i>Km/H</i>
3 × 3	9	3.87	2.89	2.25	1.64	40	102
4 × 4	16	4.34	3.16	2.35	1.41	53	102
4.5 × 4.5	20	4.74	3.35	2.45	1.45	75	102
5 × 5	25	4.97	3.44	2.45	1.32	82	102
6 × 6	36	5.36	3.62	2.45	0.98	109	70

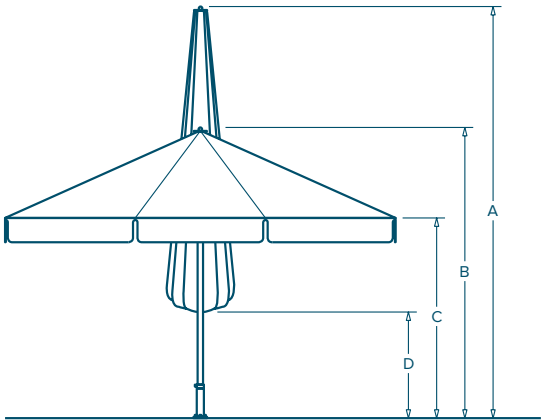



SIZE <i>m</i>	AREA <i>m</i> ²	CLOSED HEIGHT (A) <i>m</i>	OPEN HEIGHT (B) <i>m</i>	HEAD HEIGHT (C) <i>m</i>	CLEARANCE (D) <i>m</i>	WEIGHT <i>Kg</i>	MAX. WIND RESISTANCE <i>Km/H</i>
3 X 4	12	4.21	2.98	2.35	1.64	45	102
5 X 3.5	17.5	4.47	3.06	2.35	1.36	70	102
5 X 4	20	4.69	3.25	2.45	1.43	79	102
6 X 4	25	4.9	3.34	2.45	1.21	83	102
6 X 5	30	5.08	3.44	2.45	1.07	88	70
6 X 5.5	33	5.17	3.53	2.45	0.98	96	70
7 X 4	28	4.99	3.31	2.45	0.88	92	70
7.5 X 4	30	5.22	3.49	2.45	0.87	98	70

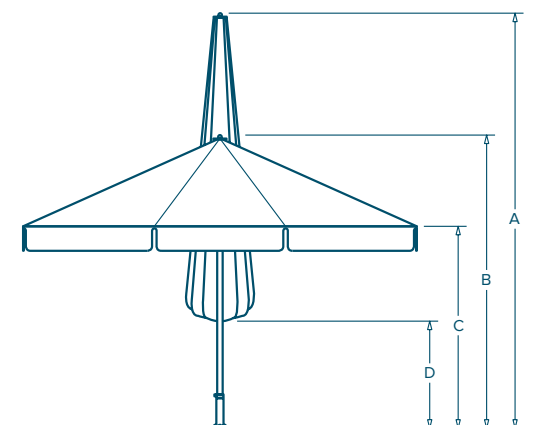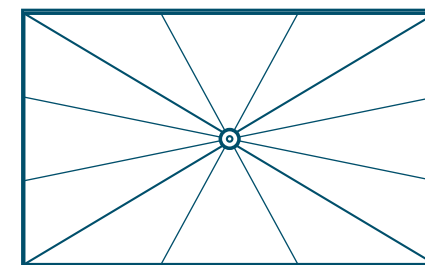

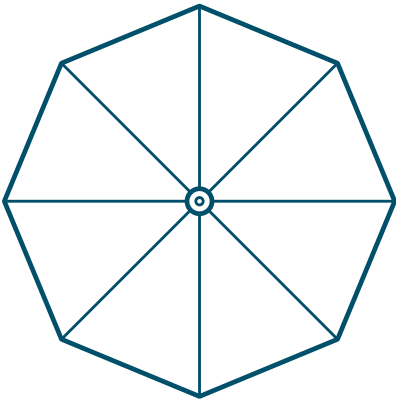


SIZE Øm	AREA m ²	CLOSED HEIGHT (A) m	OPEN HEIGHT (B) m	HEAD HEIGHT (C) m	CLEARANCE (D) m	WEIGHT Kg	MAX. WIND RESISTANCE Km/H
3	7	3.56	2.8	2.25	1.96	37	102
4	12	4.16	3.08	2.35	2.05	45	102
5	20	4.65	3.27	2.4	2.01	66	102

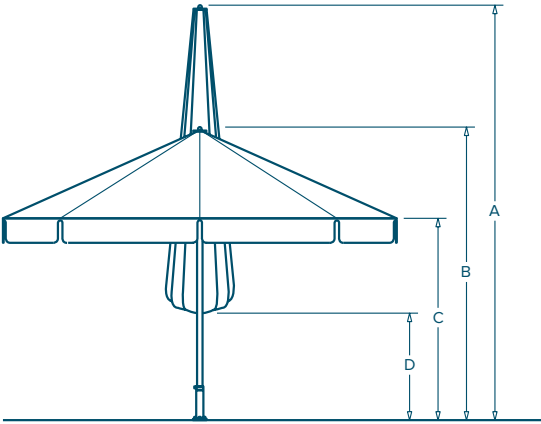

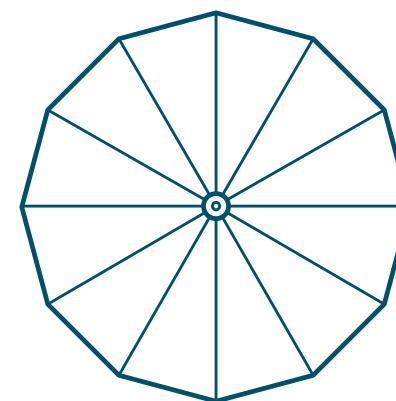

SIZE Øm	AREA m ²	CLOSED HEIGHT (A) m	OPEN HEIGHT (B) m	HEAD HEIGHT (C) m	CLEARANCE (D) m	WEIGHT Kg	MAX. WIND RESISTANCE Km/H
6	28	4.87	3.45	2.4	2.01	110	102
7	38	5.16	3.67	2.45	1.48	124	70
8	50	5.5	3.83	2.45	1.18	134	70

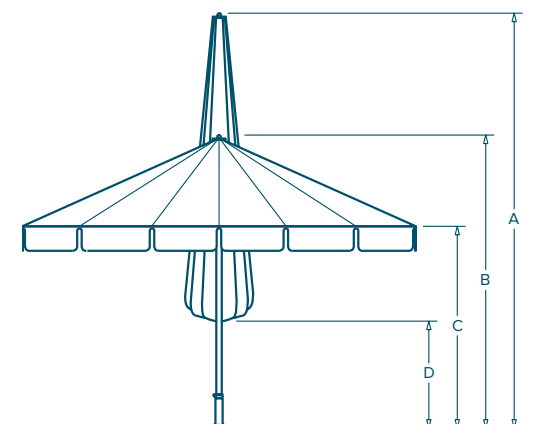


Up to eight end-arm heaters can be fixed to the corners of the parasol, facing inwards.



Up to four swift-fold heaters can be fixed to adjustable spars surrounding the mast and pointing outwards. They are easily folded and stowed when the parasol is closed.



For permanent installation, an in-ground sleeve is installed into a concrete foundation. The upper sleeve is then secured to the exposed in-ground sleeve plate. The parasol mast is inserted and secured twice - by a clamp screw and locking screws. This prevents the mast from wobbling.

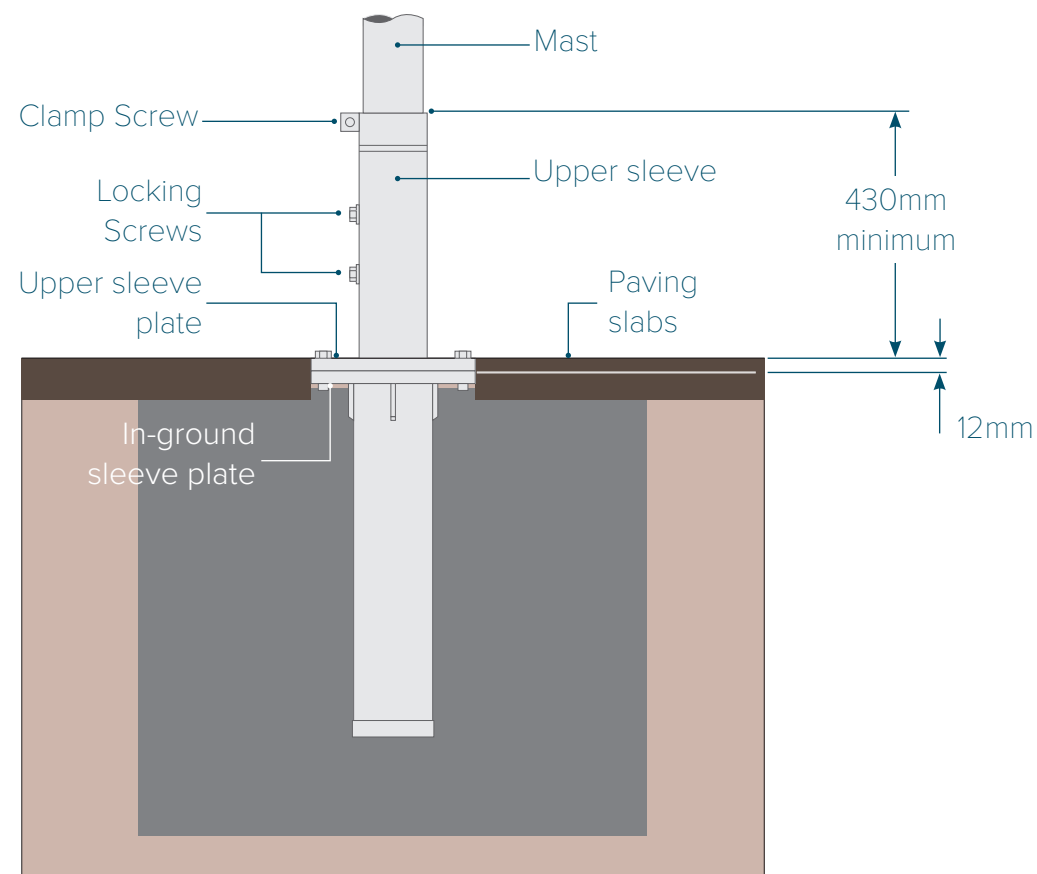

Typical ground socket configuration.
Details may vary depending on the parasol type being installed.

When ground sockets are not an option, Parasols can be installed in pedestal bases. The base consists of an upper sleeve and weighted stand.

The pedestal base is weighed down with concrete slabs. This can then be covered with an optional decked seat or planter.



Valances are a traditional and attractive addition to any parasol.

They are also perfect for branding and can be used to promote a brand or the name of your establishment.

Breezefree offer a variety of branding opportunities.



Gutters can be fitted between parasols to provide directed drainage and uninterrupted cover. The gutter is attached to the parasol by snap hooks.

Gutters can connect several parasols into one unit or can connect a parasol to a building.



Breezefree's print department will ensure that your parasols adhere to your image effectively.

The possibilities are almost limitless, from simple logos through to large, complex designs.




LED strip lights can be mounted to the parasol spars and arms.

A variety of different lighting options are available.





Noir
6028




Carbone
U171




Ardoise
8203



Pierre
6196




Argile
U387



Gris
6088



Argent
7552



Taupe
7559



Chanvre
8200




Beige
8902



Grège
6020



Chocolat
U083



Brownie
U224



Marron
0613



Cacao
8776




Toast
8891



Dune
0681



Ivoire
7548



Naturel
7133



Champagne
0806



Blé
6318



Sable
0034



Safran
8777



Turquoise
6688



Bleuet
8204



Paon
8901



Foret
6687



Azur
U388



Méditerranée
8202



Bleu
0017



Bleu Nuit
8238



Saphir
6720

Don't see the colour you want? Please contact our team and we'll do our best to find a match.

Please note: colours shown are indicative only. For an exact match, please contact Breezefree and request a physical sample.



Chardon
8778



Océan
7264



Marine
6022



Pink
U170



Mauve
8601



Cassis
7554



Châtagne
XXXX8207



Cerise
6435



Rouge
3914



Bordeaux
8206



Vermilion
0020



Jaune
6316



Mandarine
0867



Orange
0018



Papaye
8205



Paille
7560



Citron
7703



Vanille
6610




Ecu
0001



Olive
0853



Réséda
6023



Absinthe
8600



Fougère
8201



Vert
0003



Emeraude
7297



Amande
7244



Menthe
7557

Don't see the colour you want? Please contact our team and we'll do our best to find a match.

Please note: colours shown are indicative only. For an exact match, please contact Breezefree and request a physical sample.



Unit 7 Mitcham Industrial Estate
Streatham Road
Mitcham
CR4 2AP

+44 (0)20 8877 3030 | breezefree.com